




# FBLz Range

6 POLE - 960 / 1152 RPM - 50/60 HERTZ

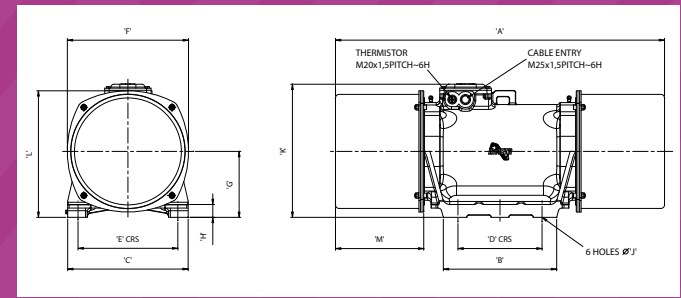

Description Description Beschreibung			Mechanical Specification Caractéristiques Mécaniques Mechanische Spezifikation						Electrical Specification Spécifications Électriques Elektrische Daten						Dimensional Specification (mm) Spécifications Dimensionnelles Dimensionale Spezifikation													
Frame Size Type Gehäusegröße	Temp. Class Classe Klasse		Centrifugal Force Force Centrifuge Fliehkraft		Working Moment Moment de Travail Arbeitsmoment Kg.cm. (x2)		Weight Poids Gewicht (Kg)		Watts Puissance Leistung		Full Load Current Le Courant plein de Chargement Volle Lastströmung		Starting Current Courant commençant Anfangende Strömung		A	B	C	D	E	F	G	H	J	K	L	M	N	
			Kg	Newtons	50 Hz.	60 Hz.	50 Hz.	60 Hz.	Input D'entrée Auf	Output De sortie Ab	400v 50 Hz.	460v 60 Hz.	400v 50 Hz.	460v 60 Hz.														
FBLz 40	-35/6		T4	3500	34335	680.0	468.0	154	147	2290	1800	5.0	4.6	25.0	22.0	689	296	310	210	248	300	160	28	22	314	310	191	M20 x 1.5p - 6H
FBLz 41	-35/6/XV	*	T4	3500	34335	680.0	468.0	154	147	2290	1800	5.0	4.6	25.0	22.0	689	296	310	210	248	300	160	28	22	314	310	191	M20 x 1.5p - 6H
FBLz 45	-42/6		T4	4200	41202	815.0	566.0	195	185	2690	2310	6.3	5.8	44.0	38.0	850	316	300	210	248	300	160	28	22	327	310	242	M25 x 1.5p - 6H
FBLz 46	-42/6/XV	*	T4	4200	41202	815.0	566.0	195	185	2690	2310	6.3	5.8	44.0	38.0	850	316	300	210	248	300	160	28	22	327	310	242	M25 x 1.5p - 6H
FBLz 45	-50/6		T4	5000	49050	970.0	673.0	209	200	2690	2310	6.3	5.8	44.0	38.0	850	316	300	210	248	300	160	28	22	327	310	242	M25 x 1.5p - 6H
FBLz 46	-50/6/XV	*	T4	5000	49050	970.0	673.0	209	200	2690	2310	6.3	5.8	44.0	38.0	850	316	300	210	248	300	160	28	22	327	310	242	M25 x 1.5p - 6H
FBLz 50	-60/6		T4	6000	58860	1164.0	808.0	300	289	4530	4000	8.8	7.9	61.0	53.0	923	318	340	236	280	340	185	35	26	375	355	247	M25 x 1.5p - 6H
FBLz 50	-60/6/XV	*	T4	6000	58860	1164.0	808.0	300	289	4530	4000	8.8	7.9	61.0	53.0	926	318	340	236	280	340	185	35	26	375	355	249	M25 x 1.5p - 6H
FBLz 50	-72/6		T4	7200	70632	1398.0	971.0	312	298	4530	4000	8.8	7.9	61.0	53.0	923	318	340	236	280	340	185	35	26	375	355	247	M25 x 1.5p - 6H
FBLz 50	-72/6/XV	*	T4	7200	70632	1398.0	971.0	312	298	4530	4000	8.8	7.9	61.0	53.0	926	318	340	236	280	340	185	35	26	375	355	249	M25 x 1.5p - 6H

\* NB: Models marked thus \* are heavy duty